

IP VANDAL RESISTANT SUBSTATION

3 GANG BACKBOX



when communication is **critical**

FEATURES

- Designed to deliver CCoIP® - Critical Communication over IP
- Vandal resistant flush-mount design
- Design in stainless steel (A304) to withstand corrosion
- One vandal proof direct call button
- Superb audio quality through wide bandwidth codec and high quality, high output power amplifier
- Integrated Web server
- Remote software upgrade, configuration and monitoring
- Line monitoring
- Possible connection to external IP video camera
- One relay output for door lock control or flash strobe light
- External call button option

DESCRIPTION

The STENTOFON vandal resistant IP substation is tough, durable and resilient, and designed for use in the harshest of environments. The station is typically used as a communication, information or emergency point and connects directly to the IP network making it easy to deploy – anywhere and at any distance.

Designed for CCoIP® the station offers a set of critical communication features such as integrated firewall, group call, call priority and over-ride, to name just a few. This enables you to deliver instant, efficient and secure voice and data services in an IP environment.

The station provides superb wideband audio quality. If even higher audio volume is required, it is possible to interface the unit to an external power amplifier.

The station has one relay and one logical output. These outputs can, for instance, be used to open a door through a connected relay. The operation of the outputs is programmable and controlled by the AlphaCom E exchange.

To provide maximum availability the station comes with advanced supervision functions. The station line test will detect if there is any faults in the network or station electronics. In addition the station support tone test, testing the complete transmission path including microphone and speaker. The status of the stations is reported to AlphaWeb as well as to 3rd party management systems using SNMP, Syslog or Microsoft OPC.




| ORDER NUMBER | DESCRIPTION | SHIP WEIGHT |
|--------------|---|-------------|
| 1008051000 | Vandal resistant IP Substation for 3-gang backbox AlphaCom E - IP station license | 0.8 kg |
| 1008098300 | 3 gang Flush mount back box | 0.8 kg |

IP VANDAL RESISTANT SUBSTATION FOR 3 GANG BACKBOX

SPECIFICATIONS

| | |
|--------------------|--|
| Dimensions (HxWxD) | 160 x 114 x 63 mm |
| Weight | 0.8 kg |
| Protection | Vandal resistant design 2 mm stainless steel front Tamper proof fastening screws and buttons and loudspeaker grille |
| Protection class | With mounting box 1008098300 IP65 |
| Call buttons | 30 mm ^ø 'mushroom' type or 22 mm stainless steel |
| Mounting | Flush mount in 3-gang back box, 3 1/2 inch deep |
| Temperature | 0 to +50°C environment |
| Power | Power over Ethernet IEEE 802.3 a-f, Class 0, Local power (19-27VDC), Idle 4W, max. 8W |
| Connectors | 2xRJ45 (Ethernet) Pluggable screw terminals |
| IP protocols | IP v4 - TCP - UDP - HTTP - RTP - RTCP - DHCP - DiffServ - TOS - STENTOFONCCIP [®] |
| Audio technology | Wideband 200 Hz - 7 kHz (722), Telephony 3.4 kHz (711), Acoustic echo cancellation, Open duplex, Adaptive jitter filter, 1.5 Watt audio output, External audio output (600 ohm) |
| Installation | Remote automatic software upgrade, Centralized provisioning, DHCP and static IP, Integrated web server |
| Operation | Network supervision, SIP statistics, Centralized monitoring, Tone test |
| Advanced features | The dual port Ethernet switch can connect to a camera or a IP device, Programmable inputs (closing contact) for monitoring door status and alarms if not used for call buttons. Programmable relay output for door control, switch on beacon, etc. (1A at 24VDC) |

FLUSH MOUNT BACK BOX

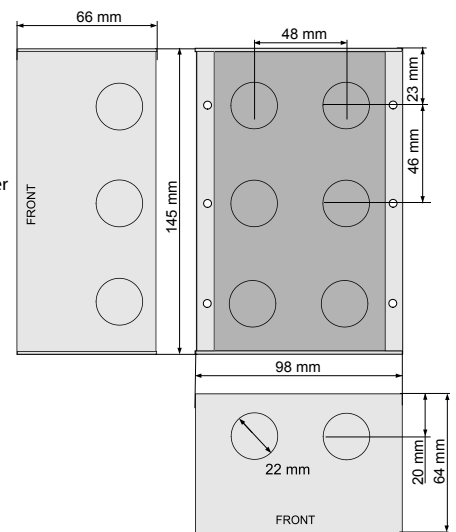

CONNECTION EXAMPLE

